



North American ADHESIVES®

PRODUCT CATALOG



Installation Solutions for
Tile and Stone

Customer Service: 1-800-747-2722
Technical Services: 1-800-637-7753
www.na-adhesives.com

About **North American Adhesives**

For more than 30 years, the North American Adhesives (NAA) brand of flooring installation products has stood for quality, innovation and a pioneering spirit. Meeting the demands of a growing and evolving tile/stone installation industry, NAA continuously adapts by offering a competitive range of products to distributors/dealers who are trying to stay ahead of the curve. As large-format tiles become more popular, our chemists regularly update formulations to ensure the effectiveness of mortars in all installations, from the small glass mosaics to large/heavy tiles such as wood-plank-look tiles.

NAA product categories include surface-preparation products, membrane systems, waterproofing, mortars, mastics, additives and grouts. NAA products sold in the USA are made in the USA, while those sold throughout the Caribbean and Central America are made in Puerto Rico or exported from the company's Fort Lauderdale, Florida, facility. A world-class, highly skilled, multilingual technical services department is available to answer contractor questions and offer installation advice.

NAA's commitment to the environment has grown continually stronger. NAA products are developed according to an environmental policy that seeks to effectively use natural resources and minimize/eliminate pollution, so buyers and users of NAA products can feel good about their product choices. In fact, many NAA products contribute to builders' efforts to achieve LEED points for sustainable projects.

Tile distributors who wish to carry NAA products should contact Customer Service at 1-800-747-2722 to find a representative near them. Export customers can contact NAA at NorthAmerican.export via Skype™. NAA products carry extensive warranties that include "lifetime" coverage for commercial and residential systems.

NAA stands ready to meet and exceed the challenges in tile and stone installations.

Surface-Preparation Products

Membrane Systems and Waterproofing

Mortars and Additives

Mastics

Grouts



Table of Contents

Product Charts

Surface Preparation	2
Waterproofing	3
Crack Isolation	3
Mortars.....	4
Grouts.....	5

Surface-Preparation Products

NA 240 Primer Grip™	5
NA 310 Self-Leveler Primer	5
NA 400 Self-Leveler.....	5
NA 420 LP Leveler.....	6
NA 450 LP Leveler Rapid	6
NA 500 Floor Patch.....	6
NA 501 Floor Patch Additive.....	6
NA 600 Multi Patch™	6
NA 1200 Shower Base Mix	7
NA 1300 Magna Float™	7

Membrane Systems and Waterproofing

NA 1510 Membrane Primer.....	7
NA 1550 Crack-Isolation Membrane.....	7
NA 1640 Crack Isolator™	8
NA 1740 Waterproof Coating	8
NA 1750 Waterproof Coating Fabric.....	8

Mortars and Additives

NA 3000 Mortar Additive.....	8
NA 3100 Floor Set™	8
NA 3120 Dual Set™	9
NA 3150 Tile Mortar.....	9
NA 3200 Multi Flex™ Pro	9
NA 3220 Multi Flex Plus.....	9
NA 3240 Multi Flex Rapid.....	9
NA 3500 Glass Set™	10

NA 3650 Magna Floor™	10
NA 3690 Magna Lite™ Pro.....	10
NA 3700 Magna Lite.....	10
NA 3785 Magna Flex™ Pro	11
NA 3800 Magna Flex.....	11

Mastics

NA 2000 Tile Adhesive	11
NA 2040 Pro Tile Adhesive.....	11

Grouts

NA 4600 Ever Color™ PQ.....	12
NA 4700 Ever Color IQ.....	12
NA 4800 Ever Color MPG.....	12

Surface Preparation

Product Name and Description	Type of Substrate							Application		
	Concrete	Plywood (interior only)	Ceramic tile	VCT/cutback adhesive	Cement backer units (CBUs)	Gypsum wallboard	Steel	Interior	Exterior	Fast-setting (or fast-drying)
NA 240 Primer Grip™ Multi-Surface Primer for Tile, Stone and Self-Leveling Underlayment Installation	●	●	●	●	●	●		●	●	●
NA 400 Self-Leveler Self-Leveling Underlayment for Interior Floors*	●	●	●	●			●	●		
NA 420 LP Leveler Low-Preparation, Self-Leveling Underlayment*	●	●	●	●	●			●		
NA 450 LP Leveler Rapid Low-Preparation, High-Performance, Rapid-Setting, Self-Leveling Underlayment*	●	●	●	●	●			●		●
NA 500 Floor Patch Rapid-Setting Patching Compound with Polymer**	●	●						●		●
NA 600 Multi Patch™ Versatile, High-Performance Concrete Patch	●							●	●	●
NA 1200 Shower Base Mix Cement-Based Trowelable Underlayment	●							●		
NA 1300 Magna Float™ Wall and Floor Rendering Mortar	●	●	●		●			●	●	

* Substrates must be primed with NA 240 Primer Grip or NA 310 Self-Leveler Primer before application of any self-leveling underlayment product.

** Mix with NA 501 Floor Patch Additive for use as an embossing leveler.

Product Charts

Waterproofing

Product Name and Description	Base	Fabric	Properties			
	Acrylic	Fabric required	Water immersion (long-term)	Curing time before tiling	Curing time before flood test	Crack isolation
NA 1740 Waterproof Coating Waterproofing and Crack-Isolation Membrane	●		●	45 to 90 minutes	12 hours	Up to 1/8" (3 mm)
NA 1750 Waterproof Coating Fabric Reinforcing Polyester Fabric		Optional				

Crack Isolation

Product Name and Description	Sound Reduction		Application		Properties			
	Porcelain tile (with ceiling and 6" [15-cm] concrete floor)	Porcelain tile (without ceiling and with 6" [15-cm] concrete floor)	Interior	Exterior	Thickness	Crack isolation	Primer required	Roll size
NA 1550 Crack-Isolation Membrane Peel-and-Stick Flexible Fabric for Crack Isolation and Sound Reduction	64 IIC, 66 STC	47 IIC, 52 STC, 16 Delta IIC	●	●	40 mils (1 mm)	Up to 3/8" (10 mm)	Yes	39.4" x 68.6 ft. (1 x 20.9 m)
NA 1640 Crack Isolator™ Liquid-Applied, Crack-Isolation Membrane	N/A	N/A	●	●	15 mils (0.4 mm)	Up to 1/8" (3 mm)	N/A	N/A

Product Charts

Mortars

Product Name and Description	Type of Substrate						Type of Tile						Application						
	Concrete	Cement backer units (CBUs)	Gypsum wallboard	Plywood	Ceramic tile	VCT/Cutback adhesive	Steel	Ceramic	Porcelain	Stone (dimensionally stable)	15" x 15" (38 x 38 cm) or larger tile	Glass and mosaic tile	Moisture-sensitive stone	Interior (residential/commercial)	Exterior (residential)	Exterior (commercial)	Fast-setting	Water immersion	Exterior facades
NA 2000 Tile Adhesive Premixed Adhesive for Ceramic and Porcelain Tile	•	•	•	•			•	•					•						
NA 2040 Pro Tile Adhesive Ready-to-Use Tile Adhesive	•	•	•	•			•	•					•						
NA 3100 Floor Set™ Floor Tile Mortar*	•	•		•			•	•	•				•	•					
NA 3120 Dual Set™ Floor and Wall Tile Mortar*	•	•	•	•			•	•	•				•	•			•	•	
NA 3150 Tile Mortar Thin-Set Mortar for Tile and Stone	•	•	•				•	•	•				•	•	•				
NA 3200 Multi Flex™ Pro Multipurpose Ceramic Tile Mortar	•	•	•	•	•	•	•	•	•				•	•					
NA 3220 Multi Flex Plus Porcelain Tile Mortar	•	•	•	•	•	•	•	•	•		•		•	•	•		•		
NA 3240 Multi Flex Rapid Fast-Setting Polymer Thin-Set Mortar	•	•	•	•	•	•	•	•	•				•	•	•	•			
NA 3500 Glass Set™ Polymer Thin-Set Mortar for Glass and Mosaic Tile	•	•	•		•	•	•	•	•	•	•		•	•	•		•	•	
NA 3650 Magna Floor™ Large-and-Heavy-Tile Mortar	•	•	•		•	•	•	•	•				•	•	•				
NA 3690 Magna Lite™ Pro Contractor-Grade, Lightweight Tile Mortar with Polymer	•	•	•	•	•	•	•	•	•				•	•	•				
NA 3700 Magna Lite Lightweight, Thin-Set Mortar with Polymer	•	•	•	•	•	•	•	•	•	•	•		•	•	•		•		
NA 3785 Magna Flex™ Pro Large-and-Heavy-Tile Mortar	•	•	•	•	•	•	•	•	•				•	•	•				
NA 3800 Magna Flex Premium Nonsag Large Tile and Stone Mortar	•	•	•	•	•	•	•	•	•	•	•		•	•	•		•	•	

* Must be mixed with NA 3000 Mortar Additive

Grouts

Product Name and Description	Application								
	Interior (residential/commercial)	Exterior (residential)	Exterior (commercial)	Water immersion	Industrial	Fast-setting	Chemical-resistant	Grout joints < 1/8" (3 mm)	Grout polished stones/marble
NA 4600 Ever Color™ PQ Premium Ready-to-Use Grout with Color-Coated Quartz	●	●	●				●	●	●
NA 4700 Ever Color IQ 100%-Solids, Industrial-Grade Epoxy Grout with Color-Coated Quartz	●			●	●	●	●		
NA 4800 Ever Color MPG Fast-Setting, Multipurpose Grout	●	●	●	●		●		●	●

Surface-Preparation Products

NA 240 Primer Grip™

Multi-Surface Primer for Tile, Stone and Self-Leveling Underlayment Installation

Pail: 1 U.S. gal. (3.79 L)
Pail: 3.5 U.S. gals. (13.2 L)



NA 240 Primer Grip is a high-performance, textured, water-based primer designed to enhance the performance and adhesion of mortars to existing ceramics and difficult-to-bond substrates. NA 240 Primer Grip can be used as a primer and bonding agent for self-leveling underlayments. NA 240 Primer Grip is suitable for a wide variety of substrates and combines excellent versatility with an easy, low-odor application. It also saves time and money by not having to tear out or scarify existing surfaces.

NA 310 Self-Leveler Primer

All-Purpose Primer for Self-Leveling Underlayments

Bottle: 1 U.S. qt. (946 mL)
Jug: 2 U.S. gals. (7.57 L)



NA 310 Self-Leveler Primer is a low-VOC, water-based acrylic primer that enhances the performance and adhesion of self-leveling underlayments on nonabsorbent surfaces such as ceramic tile, vinyl composition tile (VCT), epoxy moisture barriers and adhesive residue, as well as on profiled, absorbent surfaces. Ideal for a wide variety of substrates, NA 310 Self-Leveler Primer dries to magenta in color and combines excellent versatility with easy application. It is compatible with NA 400 Self-Leveler.

NA 400 Self-Leveler

Self-Leveling Underlayment for Interior Floors

Bag: 50 lbs. (22.7 kg)



NA 400 Self-Leveler is a high-compressive-strength, cement-based underlayment and repair mix that is easy to pour and that seeks its own level. It is ideal for leveling, smoothing and repairing interior floors up to 1" (2.5 cm) in a single application. NA 400 Self-Leveler is extremely convenient: Just mix with water and pour over the floor substrate. Its fast cure time allows tile to be installed after just 24 hours.

Surface-Preparation Products continued

NA 420 LP Leveler

Low-Preparation, Self-Leveling Underlayment

Bag: 50 lbs. (22.7 kg)



NA 420 LP Leveler is a low-preparation, self-leveling, calcium-aluminate-based underlayment and repair mix for interior concrete and engineer-approved floors. Its unique formulation allows for direct application on substrates that are clean, securely bonded and properly primed. NA 420 LP Leveler has high strength and is abrasion-resistant, and is able to accept tile and stone 16 hours after installation and moisture-sensitive floor coverings after 36 hours. NA 420 LP Leveler has a compressive strength of greater than 3,500 psi (24.1 MPa) after 28 days. NA 420 LP Leveler is quite fluid and, once mixed, can be easily installed from featheredge to 1" (2.5 cm) in a single lift.

NA 450 LP Leveler Rapid

Low-Preparation, High-Performance, Rapid-Setting, Self-Leveling Underlayment

Bag: 50 lbs. (22.7 kg)



NA 450 LP Leveler Rapid is a low-preparation, rapid-setting, self-leveling underlayment that typically requires only a clean, securely bonded and properly primed substrate before application. NA 450 LP Leveler Rapid is quite fluid once mixed and it can be easily installed from featheredge to 2" (5 cm) in a single lift. Typically requiring reduced surface preparation, NA 450 LP Leveler Rapid provides lower installation costs and fast turnaround on jobsites. NA 450 LP Leveler Rapid is able to accept tile and stone after 3 to 4 hours of installation and moisture-sensitive floor coverings after 16 to 24 hours. It has a compressive strength of greater than 4,100 psi (28.3 MPa) after 28 days.

NA 500 Floor Patch

Rapid-Setting Patching Compound with Polymer

Bag: 25 lbs. (11.3 kg)



NA 500 Floor Patch is a fast-setting, latex-fortified, sanded, cement-based patching compound with high compressive strength. When NA 500 Floor Patch is mixed with water, floor coverings can be installed in just 1 hour after application. When mixed with the latex liquid NA 500 Floor Patch Additive, NA 500 Floor Patch can be used as an embossing leveler or to encapsulate cutback adhesive residue.

NA 501 Floor Patch Additive

Latex Liquid for NA 500 Floor Patch

Jug: 1 U.S. gal. (3.79 L)



NA 501 Floor Patch Additive is an acrylic latex additive for use with NA 500 Floor Patch to improve adhesion and flexibility. When NA 500 Floor Patch is mixed with NA 501 Floor Patch Additive, the floor patch system can be used as an embossing leveler or to encapsulate cutback adhesive residue. NA 501 Floor Patch Additive also increases the working time of NA 500 Floor Patch.

NA 600 Multi Patch™

Versatile, High-Performance Concrete Patch

Bag: 25 lbs. (11.3 kg)



NA 600 Multi Patch is a fast-setting, versatile, cementitious material used for the patching of interior/exterior concrete surfaces including concrete floors, residential driveways, sidewalks and concrete pads. NA 600 Multi Patch minimizes jobsite turnaround time by setting fast for easy and cost-efficient patching of horizontal substrates before application of self-leveling underlayments.

Surface-Preparation Products continued

NA 1200 Shower Base Mix Cement-Based Trowelable Underlayment

Bag: 55 lbs. (24.9 kg) – Gray



NA 1200 Shower Base Mix is an economical blend of select sand and Portland cement. Mix with water to create a semi-dry underlayment mortar bed from 3/8" to 3" (10 mm to 7.5 cm) thick. NA 1200 Shower Base Mix is excellent for leveling rough or uneven concrete floors, and for building slopes on shower floors or other surfaces before installing ceramic tile or stone.

NA 1300 Magna Float™ Wall and Floor Rendering Mortar

Bag: 60 lbs. (27.2 kg) – Gray



NA 1300 Magna Float is a pre-blended, cement-based, polymer-fortified thick-bed and render mortar that includes a blend of select aggregates. It can be used for horizontal and vertical rendering. Rather than requiring the use of a latex additive, NA 1300 Magna Float only needs to be mixed with water to produce a thick-bed mortar of exceptional strength.

Membrane Systems and Waterproofing

NA 1510 Membrane Primer Roller-Applied Crack-Isolation Membrane Primer

Jug: 1 U.S. gal. (3.79 L)
Pail: 5 U.S. gals. (18.9 L)



NA 1510 Membrane Primer is a water-based, acrylic membrane primer designed for priming properly prepared substrates before installing peel-and-stick membranes. Applied by Roller or brush, a coat of NA 1510 Membrane Primer is ready for NA 1550 Crack-Isolation Membrane after about 15 minutes of drying time.

NA 1550 Crack-Isolation Membrane Peel-and-Stick Flexible Fabric for Crack Isolation and Sound Reduction

Roll: 39.4" x 68.6 ft. (1 x 20.9 m),
for 225 sq. ft. (20.9 m²)



NA 1550 Crack-Isolation Membrane is a flexible, thin, lightweight, load-bearing, "self-adhered" membrane over which ceramic tile and natural stone can be installed immediately with any polymer-modified cement mortar. NA 1550 Crack-Isolation Membrane can be used to prevent in-plane floor cracks (up to 3/8" [10 mm] wide) from transferring through tile, stone and grout, and to help prevent gaps in wood-floor installations due to subfloor movement. NA 1550 Crack-Isolation Membrane is also excellent for use in multi-story buildings to reduce airborne and impact sound transmission between floors.

Membrane Systems and Waterproofing continued

NA 1640 Crack Isolator™

Liquid-Applied, Crack-Isolation Membrane

Pail: 1 U.S. gal. (3.79 L)
Pail: 3.5 U.S. gals. (13.2 L)



NA 1640 Crack Isolator is a premixed, liquid-applied, quick-drying membrane applied over concrete substrates to keep cracks from migrating up through ceramic tile and stone installations. NA 1640 Crack Isolator can be used for ceramic tile and stone in residential and commercial interior/ exterior environments. It meets ANSI A118.12 requirements and provides up to 1/8" (3 mm) of in-plane crack isolation. It is then ready to receive most North American Adhesives (NAA) polymer-modified or epoxy mortars.

NA 1740 Waterproof Coating

Waterproofing and Crack-Isolation Membrane

Pail: 1 U.S. gal. (3.79 L)
Pail: 3.5 U.S. gals. (13.2 L)



NA 1740 Waterproof Coating is a premixed, fast-drying, liquid-applied waterproofing and crack-isolation membrane for installation under ceramic tile or stone in residential, commercial and industrial environments. NA 1740 Waterproof Coating provides a thin, continuous barrier to protect adjacent rooms and floors below from water damage. NA 1740 Waterproof Coating can be applied with a Roller or brush and is ready to receive tile or stone after 45 to 90 minutes of drying time.

When using NA 1740 Waterproof Coating, ceramic tile or stone can be installed with any North American Adhesives (NAA) polymer-modified or epoxy mortar. For common problem areas like coves, corners, cracks and drains, NA 1740 Waterproof Coating can be combined with optional NA 1750 Waterproof Coating Fabric to provide additional protection. NA 1740 Waterproof Coating can be flood-tested after 12 hours of drying time, and exceeds ANSI A118.10 and ANSI A118.12 standards. NA 1740 Waterproof Coating has no odor and is great for use in confined spaces.

NA 1750 Waterproof Coating Fabric

Reinforcing Polyester Fabric

Roll: 38" x 75 ft. (97 cm x 22.9 m)



NA 1750 Waterproof Coating Fabric is a thin, flexible, lightweight, alkali-resistant, non-woven polyester fabric for optional embedment with NA 1740 Waterproof Coating under ceramic tile or stone. NA 1750 Waterproof Coating Fabric quickly absorbs and bonds with NA 1740 Waterproof Coating to provide an additional level of durability, protection and insurance against water damage. NA 1750 Waterproof Coating Fabric is available as a 38" (97 cm) wide Roll. The fabric can easily be cut to size with scissors or a razor knife, and lays flat during installation.

Mortars and Additives

NA 3000 Mortar Additive

Acrylic Latex Mortar Additive

Jug: 2 U.S. gals. (7.57 L) – White



NA 3000 Mortar Additive is a professional-grade, acrylic latex admixture used to enhance the performance of dry-set mortars as well as NA 3500 Glass Set™ mortar. This highly recommended admixture enhances bond strength, flexural strength, elongation and freeze/thaw durability.

NA 3100 Floor Set™

Floor Tile Mortar

Bag: 50 lbs. (22.7 kg) – Gray
Bag: 50 lbs. (22.7 kg) – White



NA 3100 Floor Set is an economical thin-set mortar that, when mixed with water, is for setting ceramic tile, quarry tile and pavers over indoor residential concrete floors. When mixed with NA 3000 Mortar Additive, NA 3100 Floor Set can also be used for setting porcelain, marble, slate and granite in indoor or outdoor residential and light commercial floors, even with freeze/thaw conditions.

Mortars and Additives continued

NA 3120 Dual Set™

Floor and Wall Tile Mortar

Bag: 50 lbs. (22.7 kg) – Gray
Bag: 50 lbs. (22.7 kg) – White



NA 3120 Dual Set is a specially formulated thin-set mortar that, when mixed with water, is ideal for setting most ceramic tiles, ceramic mosaics, quarry tiles and pavers on indoor/outdoor residential floors and walls made of concrete, masonry block or brick under intermittent water exposure. When mixed with NA 3000 Mortar Additive, NA 3120 Dual Set can also be used for setting additional tiles such as porcelain, marble, slate and granite. Use it for indoor/outdoor residential to light commercial floor and wall installations in normal or freeze/thaw conditions as well as submerged conditions such as pools, spas and fountains.

NA 3150 Tile Mortar

Thin-Set Mortar for Tile and Stone

Bag: 50 lbs. (22.7 kg) – Gray
Bag: 50 lbs. (22.7 kg) – White



NA 3150 Tile Mortar is a single-component, thin-set mortar formulated with a unique dry polymer, resulting in good adhesion to substrates and tile. Use NA 3150 Tile Mortar for most residential/commercial installations on indoor floors/walls/countertops, residential outdoor floors/walls and commercial outdoor floors. Mixed with water only, NA 3150 Tile Mortar meets ANSI A118.4 standards and is good for installing dimensional stone, ceramic, porcelain, quarry tile and pavers over most traditional substrates.

NA 3200 Multi Flex™ Pro

Multipurpose Ceramic Tile Mortar

Bag: 50 lbs. (22.7 kg) – Gray
Bag: 50 lbs. (22.7 kg) – White



NA 3200 Multi Flex Pro is a standard-grade, polymer-modified, thin-set mortar for most interior/exterior residential and commercial floors; interior/exterior residential walls; and interior commercial walls. NA 3200 Multi Flex Pro provides an excellent bond for ceramic, porcelain, pavers and most marble, granite and natural-stone tile installations.

NA 3220 Multi Flex™ Plus

Porcelain Tile Mortar

Bag: 50 lbs. (22.7 kg) – Gray
Bag: 50 lbs. (22.7 kg) – White



NA 3220 Multi Flex Plus is a polymer-modified mortar for thin-set applications on most interior/exterior residential and commercial floors; interior/exterior residential walls; and interior commercial walls. NA 3220 Multi Flex Plus provides an excellent bond for ceramic, porcelain, quarry, pavers and most marble, granite and natural-stone tile installations.

NA 3240 Multi Flex™ Rapid

Fast-Setting Polymer Thin-Set Mortar

Bag: 50 lbs. (22.7 kg) – Gray
Bag: 50 lbs. (22.7 kg) – White



NA 3240 Multi Flex Rapid is an improved-performance, single-component, polymer-fortified, fast-setting thin-set mortar for most interior and exterior installations of tile and stone. This mortar contains a higher amount of dry polymer that, when mixed with water, provides an improved bond between tile and stone over a wider variety of substrates in residential and commercial installations. NA 3240 Multi Flex Rapid's fast-setting property allows tile to be grouted after 2 to 3 hours, making this mortar ideal for tile projects that must be done quickly. NA 3240 Multi Flex Rapid meets or exceeds ANSI A118.4F, ANSI A118.11 and ANSI A118.15F requirements for fast-setting mortars when mixed with water.

Mortars and Additives continued

NA 3500 Glass Set™

Polymer Thin-Set Mortar for Glass and Mosaic Tile

Bag: 43 lbs. (19.5 kg)



NA 3500 Glass Set is a premium-grade, polymer-fortified, multipurpose, thin-set mortar for installing glass tile, glass mosaics and marble mosaics, and is also ideal for installing light-colored translucent natural stone. When mixed with NA 3000 Mortar Additive instead of water, NA 3500 Glass Set provides greater bond strength, can be used for submerged installations, and meets or exceeds ANSI A118.11 and A118.4 industry standards. NA 3500 Glass Set's bright white property enhances the color of translucent and transparent glass tile better than ordinary white thin-set mortars.

NA 3650 Magna Floor™

Large-and-Heavy-Tile Mortar

Bag: 50 lbs. (22.7 kg) – Gray

Bag: 50 lbs. (22.7 kg) – White



NA 3650 Magna Floor is a medium-bed, polymer-modified mortar for use under large-format and heavy tile and stone. It also works great under porcelain tile, heavy-ribbed-back tile, brick pavers, dimensional tile, quarry tile, Saltillo tile, marble, granite and natural stone.

NA 3690 Magna Lite™ Pro

Contractor-Grade, Lightweight Tile Mortar with Polymer

Bag: 25 lbs. (11.3 kg) – Gray

Bag: 25 lbs. (11.3 kg) – White



NA 3690 Magna Lite Pro is a contractor-grade, lightweight, thin-set mortar that can also be used for medium-bed and nonsag applications. It glides on smooth and easy, and it provides twice the coverage of a standard thin-set mortar per pound/kg. NA 3690 Magna Lite Pro meets or exceeds industry standards including ANSI A118.4TE, A118.11 and A138.1 bond strength requirements, and is ISO 13007 classified C1TES1.

NA 3700 Magna Lite™

Lightweight, Thin-Set Mortar with Polymer

Bag: 25 lbs. (11.3 kg) – Neutral



NA 3700 Magna Lite is a premium-grade, lightweight, thin-set mortar fortified with polymer for enhanced bonding to ceramic, porcelain, quarry, pavers and most marble, granite and natural-stone tiles. This formula is also good for large-and-heavy-tile installations on floors and nonsag applications on walls. NA 3700 Magna Lite provides twice the coverage of a standard mortar per pound/kg. It has a smooth and creamy consistency, and is mold- and mildew-resistant.

Mortars and Additives continued

NA 3785 Magna Flex™ Pro

Large-and-Heavy-Tile Mortar

Bag: 50 lbs. (22.7 kg) – Gray
Bag: 50 lbs. (22.7 kg) – White



NA 3785 Magna Flex Pro is highly versatile and can be used as a large-and-heavy-tile mortar and thin-set mortar for installations on floors, walls and countertops. It can also be used as a mortar over uncoupling, crack-isolation, soundproofing and waterproofing membranes. NA 3785 Magna Flex Pro meets or exceeds industry-standard ANSI A118.4TE and A118.11 bond strength requirements, and is ISO 13007 C2TE classified.

NA 3800 Magna Flex™

Premium Nonsag Large Tile and Stone Mortar

Bag: 50 lbs. (22.7 kg) – Gray
Bag: 50 lbs. (22.7 kg) – White



NA 3800 Magna Flex is a premium, nonsag medium-bed mortar that is ideal for installing large-format tile and stone on interior/exterior floors, walls and countertops. NA 3800 Magna Flex can also be used in thin-set applications to install smaller-format tile and stone. This mortar has a high content of unique dry polymer, which provides excellent bond between the substrate and tile or stone. Mixed with water only, it meets or exceeds ANSI A118.4 and ANSI A118.11 standards.

Mastics

NA 2000 Tile Adhesive

Premixed Adhesive for Ceramic and Porcelain Tile

Pail: 3.5 U.S. gals. (13.2 L) – Beige
Pail: 5 U.S. gals. (18.9 L) – Beige



NA 2000 Tile Adhesive is a ready-to-use, nonflammable, high-viscosity, synthetic polymer emulsion-based adhesive with extended open time. It can be used for indoor, light-duty, residential installations of mosaic, ceramic, quarry, porcelain and non-moisture-sensitive tile on floors, countertops and ceilings (up to 6" x 6" [15 x 15 cm]) and walls (up to 8" x 8" [20 x 20 cm]) in dry or intermittent wet areas (backsplashes, shower, tub and bath surrounds). NA 2000 Tile Adhesive has nonslip attributes for vertical use and is easy to trowel on floors, walls and ceilings

NA 2040 Pro Tile Adhesive

Ready-to-Use Tile Adhesive

Pail: 1 U.S. qt. (946 mL) – Off-white
Pail: 1 U.S. gal. (3.79 L) – Off-white
Pail: 3.5 U.S. gals. (13.2 L) – Off-white



NA 2040 Pro Tile Adhesive is a premium-grade, premixed organic adhesive for setting all types of ceramic and porcelain tile; and non-moisture-sensitive stone up to 6" x 6" (15 x 15 cm) on indoor residential floors (light-duty traffic), countertops and ceilings, and up to 12" x 12" (30 x 30 cm) on walls in areas that are dry or with intermittent wet conditions. NA 2040 Pro Tile Adhesive also can be used for tub and bath surrounds, and shower surrounds with precast shower bases



Grouts

NA 4600 Ever Color™ PQ

Premium Ready-to-Use
Grout with Color-Coated
Quartz

Pail: 1 U.S. gal. (3.79 L)



NA 4600 Ever Color PQ is a premium-grade, ready-to-use specialty grout for use with porcelain, ceramic and natural-stone tiles, and is ideal for both commercial and residential applications. No sealer is required because its composition helps prevent water-based stains. NA 4600 Ever Color PQ is formulated with the latest innovation in quartz aggregate, ensuring color consistency, ease of cleanability and improved workability.

NA 4700 Ever Color™ IQ

100%-Solids, Industrial-Grade
Epoxy Grout with
Color-Coated Quartz

Kit

2 pouches of liquid (resin) –
Part A, 37.38 U.S. oz. (1.11 L) each
2 plastic jars of liquid (hardener) –
Part B, 19.2 U.S. oz. (0.57 L) each
2 bags of powder (colorant) –
Part C, 9.29 lbs. (4.21 kg) each



NA 4700 Ever Color IQ is a water-cleanable, 100%-solids epoxy grout with high chemical and stain resistance. It is a nonshrinking, nonsagging, fast-curing, efflorescence-free grout. Color-coated quartz dramatically improves its cleanability, so that NA 4700 Ever Color IQ leaves very little film residue during cleanup of excess grout with a grout float. The color-coated quartz also eliminates pigment bleed, so tiles are not stained during installation.

This grout is perfectly suited for use in commercial kitchens, meat packing houses, and any commercial and institutional floors that require daily cleaning with properly utilized enzymatic cleaners. NA 4700 Ever Color IQ is ideal for applications where high-strength, mold- and mildew-resistant grout joints are required. In addition, it has high temperature resistance and can be steam-cleaned. NA 4700 Ever Color IQ meets ANSI A118.3 requirements and ANSI A118.5 physical testing requirements, and meets ISO 13007 classification RG.

NA 4800 Ever Color™ MPG

Fast-Setting,
Multipurpose Grout

Bag: 10 lbs. (4.54 kg)
Bag: 25 lbs. (11.3 kg)





NA 4800 Ever Color MPG is a premium, fine-aggregate, fast-setting grout for joint widths from 1/16" to 3/4" (1.5 to 19 mm). NA 4800 Ever Color MPG's unique composition eliminates the common problems that are related to Portland-cement grout, such as color consistency and efflorescence. Along with offering higher polymer content, this grout reduces absorption and increases stain resistance when compared with standard-performance cement grouts.



Not just a COLOR, but a FEELING.

ALASKAN ICE	500
ASPEN SNOW	503
MONTEREY SURF	577
CLASSIC IVORY	542
MISTY GRAY	509
AMERICAN STEEL	521
MONTANA GRAY	524
PRAIRIE FIELDS	527
SMOKY COAL	536
BLACK DIAMOND	539
HARVEST MOON	549
COLONIAL BEIGE	548
DAKOTA DUNES	551
DESERT DAWN	515
OREGON TAUPE	550
MOJAVE DUNES	569
NEWPORT SAND	554
LAKOTA WHEAT	556
CHESTNUT	575
GEORGIA PECAN	514
CAJUN COFFEE	579
DARK MOLASSES	507
EUCALYPTUS	581
SOFT SKY	582
SUNSET SHADOW	583
GRAND SEQUOIA	584

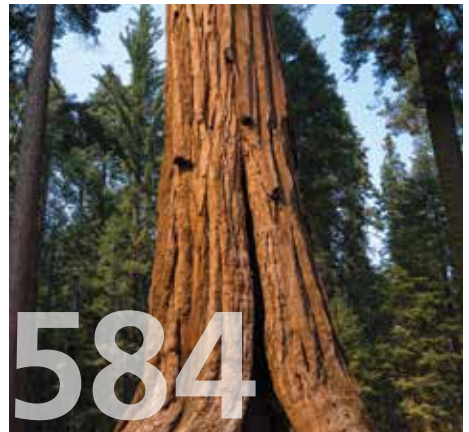



North American
ADHESIVES®

1144 E. Newport Center Drive,
Deerfield Beach, FL
33442

Customer Service
Phone: 1-800-747-2722

Technical Services
Phone: 1-800-637-7753

www.na-adhesives.com